



# Electronic Services Amplifier Layout & Connections

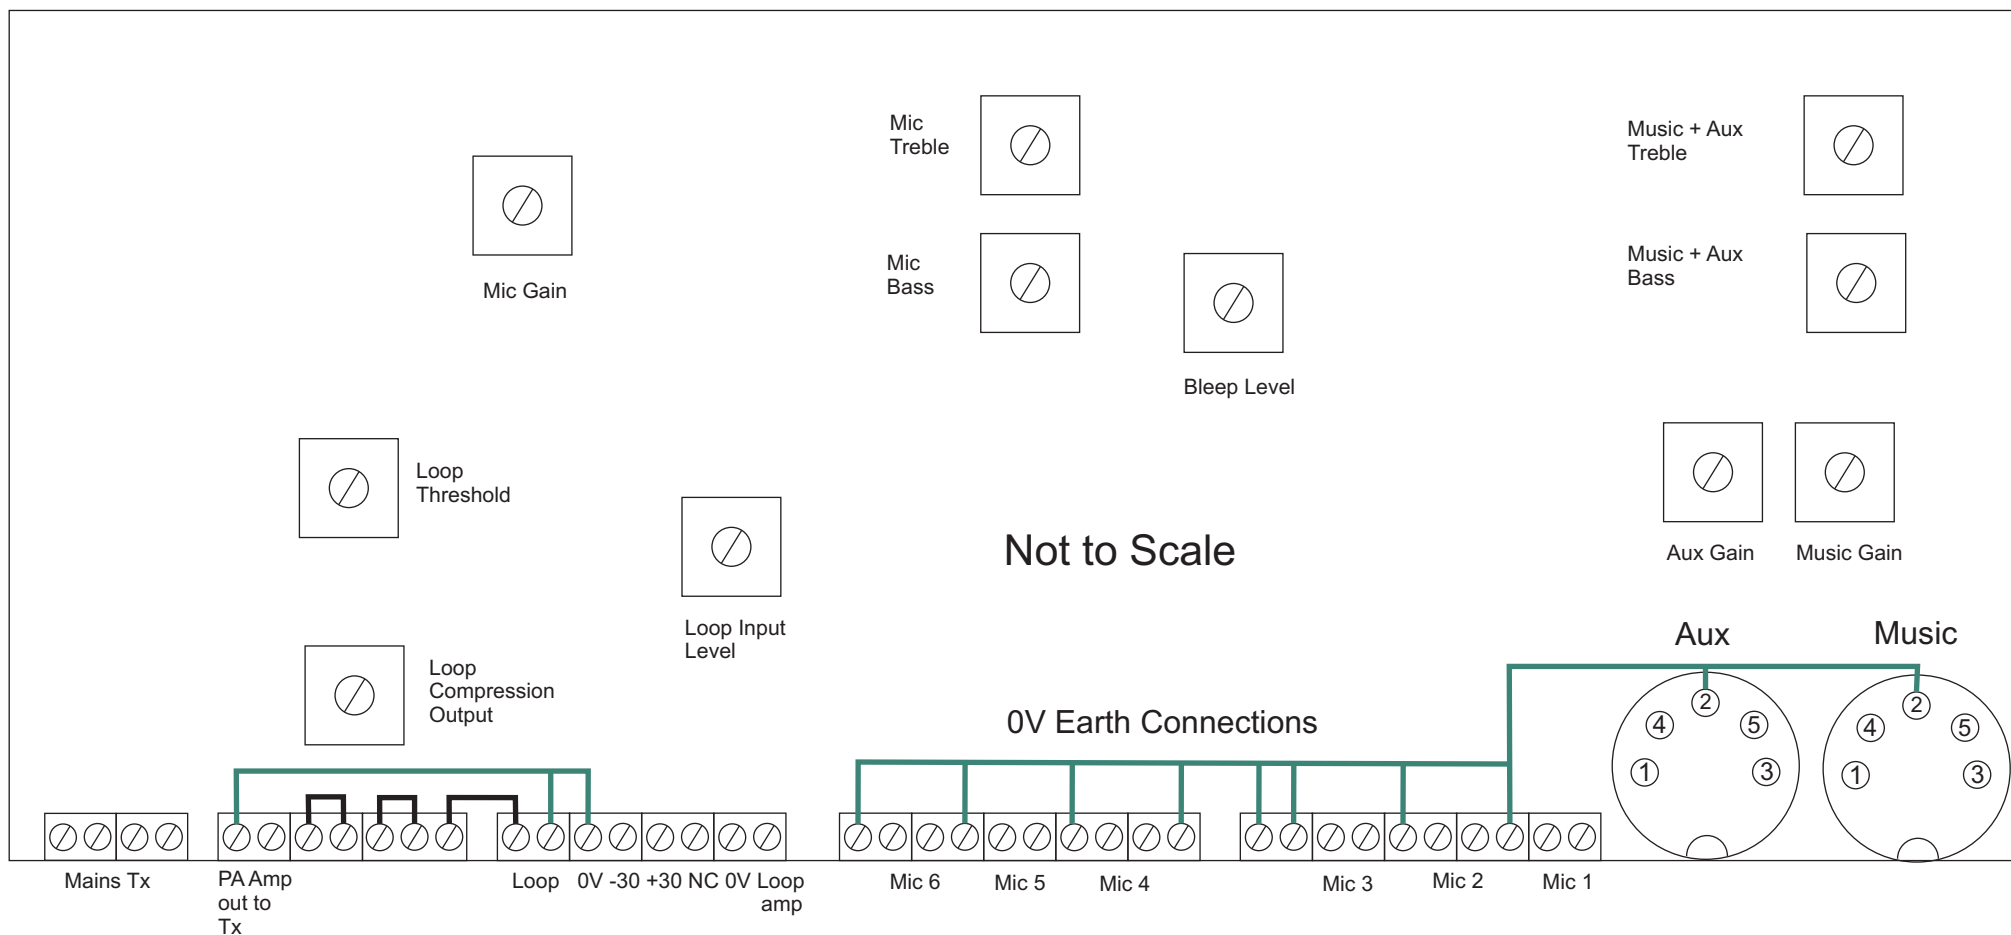

## Connecting your TDS to this amplifier

Ideally, use a spare recording output from either the Aux or Music DIN socket. Connect signal to pins 1 or 4 and screen to pin 2. At the TDS, connect the signal wire to XLR pin 2 and the screen to XLR pin 3. If you wish to ground the TDS case (not essential), connect XLR pin 3 to pin 1. Move the internal link within the TDS from J1 to J2 (0dB Line In). Note this will disable the attenuator (links J5 - J10).

If you cannot use the recording output, then connect direct to the 100V line Speaker Output. Leave all the links as originally supplied ie J1 and J5 enabled.



100V Line  
Speaker Output

Induction Loop  
Output

## DIN Connector Wiring

Pin 1 - Record Output  
Pin 2 - Ov Screen  
Pin 3 - Input  
Pin 4 - Record Output  
Pin 5 - Input

Pins 1 + 4 are shorted